



TECHNICAL DATASHEET

REFERENCE : **E4054-8XX**

Old référence :

Description :



Mitten leather RHT back aluminized

RHT (High Temperature Resistant) crusted leather mitten - 500g / m² aluminized fabric back - internal wool insulation - all Kevlar® thread seams - excellent mechanical resistance: level 4 out of 4 abrasion / tearing / perforation. aluminized leather and uppermost resistance (level 4 out of 4) with large projections of molten metal and aluminized top (4 out of 4) maximum level with radiant heat

Dimensions : 30/40/50cm

Sizes available T 10/11 Unique


Recommandation

Allows the contact of parts up to 250 ° C above the glove protecting the back of the hand against radiant heat and splashes of molten metal - Use: flame cutting, welding, foundry, iron and steel industry

The materials of this article do not contain any substance that can harm the health of the user

This PPE is in conformity with the requirements of the Directive 89/686/CEE.
PPE class III, AET N°033/2020/0375

The CE marking on these items means the respect for the essentials requirements of European Directive on PPE based on the standard EN 420

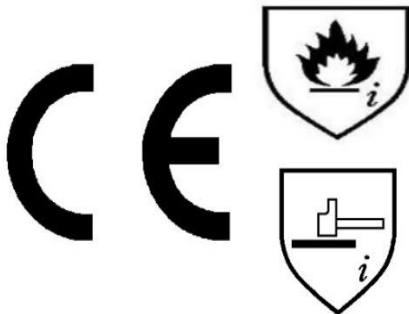

4124X4
ABCDEF
EN 407

4144X
ABCD
EN 388

A Burning behavior
B Contact Heat
C Convective heat
D Radiant heat
E Small splashes of molten metal
F Large splashes of molten metal

« x » non tested

A Abrasion
B Blade cutting
C Tear resistance
D Perforation

Use only within the risks covered above

Maintenance :



The washing of gloves or mittens can alter the performance , so it's not recommended to wash them. Grease or oil on a glove can ignite, a wet glove transmits faster heat.No wash advised

Storage : Protected from the light and in a dry place, free of moisture, oils, greases...

Recommandation : wear in addition to appropriate PPE (fireproof clothing, cuff and / or aluminized coat ...)